


I2350M Series

Infinique Networks Layer3 Aggregation Switch

10G Uplink, Managed, Stackable for Enterprise and SMB Applications

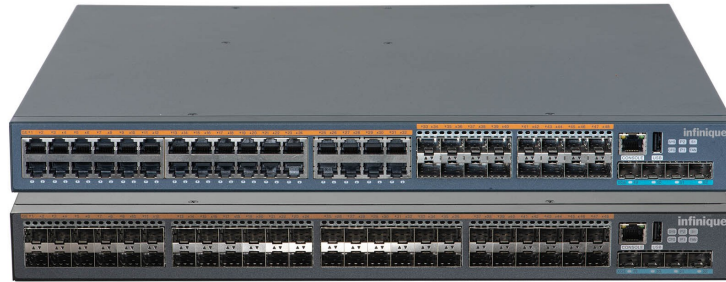

Overview

Infinique's 2350M Series Switches are a high performance Layer-3 Stackable Managed network switches that are stable, reliable and are designed for ease of use. These switches offer excellent high speed performance through line-rate forwarding on all ports, and have advance redundancy and reliability features that are implemented through the industry standard protocols like the Ethernet Ring Protection Switching Protocol (ERPS), and the Virtual Router Redundancy Protocol (VRRP) which increases the availability through uplink backup capabilities.

The 2350M series switches offer a comprehensive set of options for management of switches through protocols like SNMP and Cloud, providing easy configuration and setup of switches using Web or Command Line Interface. These switches provide higher bandwidth connections through 10 Gigabit SFP+ Uplink ports and help improve fault tolerance and reliability via Virtual Stacking Technology that simplifies network management and expansion.

Built with security and advance features, the switches can act as aggregation switches and meet the very comprehensive demands of Enterprise, Small and Medium Business Ethernet network infrastructure requirements for branch offices of corporate and banks, hotels, hospitals, schools, college and university campus, restaurants and retail chain stores.

Product Highlights

- High performance 1G Ethernet Ports for Fast Connections
- 10 Gigabit SFP+ Uplink Ports for High Bandwidth Connections to support Servers and Storage
- Physical Stacking of up to 8 Switches to create a Single Virtual Switch or Logical Device for fault tolerance and reliability
- Supports Standard Spanning Tree Protocols ensuring seamless connectivity and high availability
- Universal 10/100/1000 Mbps ports for legacy to latest Gigabit devices
- Effectively access and manage network switches from remote locations using Cloud reducing management costs
- Zero Touch Provisioning for easy and quick deployment
- Effectively manage network bandwidth by traffic prioritization and resource allocation using advanced QoS
- Control network access with a range of features that provide user and device authentication and ensure network security
- Robust Aluminum metal alloy enclosure with Fan or Fan-less design for excellent heat dissipation
- Supports Industry Standards such as IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.3ab, IEEE 802.3x, IEEE 802.3az, IEEE 802.3ah and more.

I2350M Series

Infinique Networks Layer3 10G Managed Aggregation Switch

Series Snapshot

Model/Max. Ports		54	54
Port Type	RJ45	-	32
	SFP	48	16
	SFP+	4	4
Expansion Slot (2-Port 10G SFP+)		1	1
Console Port (RJ45/USB)		Both	Both
Power (AC) - Modular		Dual	Dual
Switching Capacity (Gbps)		216	216

Refer Ordering Section for Part Numbers

Salient Features

High Availability

The I2350M series switches offer excellent feature of redundancy and reliability and cater to very diverse networking requirements. In addition to supporting traditional spanning tree protocols such as STP, RSTP, and MSTP, the switches also comply with the ITU-T G.8032 international standard, the Ethernet Ring Protection Switching (ERPS) protocol which enables rapid failover within Ethernet ring network topologies, ensuring seamless connectivity and minimal downtime. Additionally it incorporates the Virtual Router Redundancy Protocol (VRRP), which helps increase the availability through uplink backup capabilities.

Stack together for Bandwidth and Management

The I2350M series switches can be combined together to form a single virtual stack or logical unit. The stacking is achieved by connecting multiple switches together through the 10G SFP+ ports to form a single virtual switch that helps improve the switches link reliability, increase bandwidth and provide simple configuration and management, and ease of network expansion.

Quality of Service ensuring Performance

The Quality of Service (QoS) capabilities of switches guarantees the network traffic of various applications, such as streaming video, VoIP calls, and data transfer, is prioritized correctly and with the right resource allocation as per the requirements of the application. This is achieved with the advanced scheduling algorithms such as SP, WRR, WFQ, SP+WRR and SP+WFQ and diverse priority mapping techniques such as 802.1p and DSCP, that enable control over traffic classification and prioritization.

Zero Touch Provisioning for Quick Setup

Infinique's I2350M series provide advanced ZTP features for easy deployment. Using this feature the switches can discover and install necessary version files from a file server eliminating the need for manual setup during the initial setup. This helps reduce the configuration errors and accelerates the deployment process, while enhancing the overall network efficiency, making these switches an ideal choice for network administrators.

Management Options for Easy Administration

The I2350M series offer a comprehensive set of management features and options to provide an easy way to manage tasks. Available features include network management protocols like Cloud and SNMP, Configuration and Control options using Web and CLI, Monitoring and Diagnostics tools such as RMON and SYSLOG, help network administrators to monitor and maintain the network for optimum performance.

Authentication and Secure Access

These series of network switches offer a comprehensive suite of security features that provide both user and device authentication and protection. The features include user authentication, port security, Access Control Lists (ACL), Loopback Detection and 802.1x Authentication. Robust security functions such as IP Source Guard, DHCP Snooping, Dynamic ARP Inspection and PPPoE+ ensure excellent protection for network access. These network switches also support MAC binding, and counter measure against network storm, ARP snooping and protocol packet attacks making it an ideal access network switch.

Industry Standards Compliance

The I2350M series switches are designed for industry standards and include various IEEE standards such as IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, and IEEE 802.3az. These standards make sure that your network operates with the latest technologies and is compatible with a wide range of networking equipment, providing interoperability and future-proofing your infrastructure investment.

Infinique Networks Layer3 10G Managed Aggregation Switch

NETWORK MANAGEMENT FEATURES

Ports and Interface

Basic Port Configuration	Auto MDI/MDIX, Port Type UNI/NNI Port Speed, Port Duplex, Port MTU(Jumbo Frame), Port Isolation, Port Loopback, Port Energy Control
MAC Address Management	MAC Address Aging Time, MAC Address Learning ON/OFF, MAC Address Learning Limitation, Static MAC Address, MAC Address Filter, MAC address VLAN Binding, MAC Debug
Storm Control	Storm, Flood Control and Shutdown Control for BUM
Logical	Loop-back, Tunnel, Null, L2/L3 VLAN and L3 Ethernet interfaces

Ring Protection

Spanning Tree Protocols	STP/RSTP/MSTP, BPDU Guard, BPDU Filter, Flap Guard, Loop Guard, Root Guard, TC Guard, BPDU L2protocol Tunnel
Other Protocols	VIST/VIST+, G.8032 (Ethernet Ring Protection Switching) v1, v2

Link Aggregation

LACP Configuration	LACP Link Aggregation, LACP Port Priority, LACP Load Balance, LACP Rate Monitor, LACP Debug
--------------------	---

VLAN

VLAN Management	VLAN, VLAN PVID, VLAN Trunk, VLAN Hybrid, VLAN Interface, MAC VLAN, Protocol VLAN, IP Subnet VLAN, Super VLAN, Voice VLAN, Private VLAN, Guest VLAN, GVRP, Basic QinQ, Selective QinQ, 802.1ad, VLAN Mapping, VLAN Debug, VLAN Isolation
-----------------	--

IP Services

IP Protocol	ARP, DNS, NTP Server/Client, ICMP, ECMP, GRE, IPIP, IPv6 over IPv4, ISATAP, IPv4 over IPv6, IPv6 over IPv6
Routing Protocol	Static Routing v4/v6, RIP/RIPng, OSPF v2/v3, BGP/BGP+, ISIS/ISIS v6, VRRP/VRRP v3, VBRP, PBR/PBR v6, IP-VRF
DHCP Service	DHCP v4/v6 Server, DHCP v4/v6 Client, DHCP v4/v6 Relay, DHCP Snooping, DHCP Option 51/82

Multicast

L2 Multicast Protocols	IGMP v1/v2/v3 Snooping, Fast Leave, IGMP Snooping Proxy, MLD Snooping, MVR, MVP
L3 Multicast Protocols	IGMPv1/v2/v3, PIM v4/v6-SM, PIM v4/v6-SSM, PIM-DM, PIM-SDM,

Quality of Service (QoS)

Flow Classification	802.1P Priority, DSCP Priority, VLAN ID, MAC Prefix, IP Subnet, Protocol, IP Precedence, IPv6 Traffic Class, Ethernet Type
Traffic Control	Rate Limit and Port based Bandwidth, Traffic Shaping
Traffic Classification	Three Color Marker, Priority Remark, Traffic Redirect/Meter/Mirror
Scheduling	Port-based Priority, SP, WRR, WFQ, SP+WRR, SP+WDRR, SP+WFQ
Congestion Management	Tail-drop, RED, WRED

Error Handling and Fault Detection

Error-Disable Configuration	Error-Disable Based on BPDU-guard, Loopback-detect, Port Security; Error-Disable Recovery
Fault Detection	UDLD, Loop-back Detection, CFM, Monitor Link (MTLK)

Security

Port Security	Rule Based On IP/MAC/MAX/Sticky, Violation (Protect/Restrict/Shutdown), Recovery
Network Access Control	IP Source Guard (ISG), DHCP Snooping, ND Snooping, Host Guard
Access Control List	Standard IP ACL, Extended IP ACL, Standard MAC ACL, Extended MAC ACL, Standard Hybrid ACL, Extended Hybrid ACL, Standard IPv6 ACL, Extended IPv6 ACL, Time-based ACL
Threat Prevention	Dynamic ARP Inspection (DA), ARP Check, AARF ARP-Guard, ARP Speed Limit, ARP Source Suppression, PPPoE+
AAA	Local Authentication, Radius (Authentication, User Login Authorization, User Login Accounting), TACACS+ (Authentication, User Login Authorization, Command Authorization, User Login Accounting, Command Accounting)

I2350M Series

Infinique Networks Layer3 10G Managed Aggregation Switch

NETWORK MANAGEMENT FEATURES

802.1x Port-based 802.1X, MAC-based 802.1X, MAC-Authentication, Guest-VLAN, VLAN Distribution (Auto-VLAN), ACL Distribution

Anti Attack Anti-Attack Detect/Drop/Flood/Log, URPF, White List, Black List

Configuration and Management

Monitoring and Diagnostics 1:1 SPAN, N:1 SPAN, RSPAN, Flow-based Mirror, Ping, Tracert, DDM, VCT

Device Management SNMP v1/v2/v3, SNMP Trap, RMON, SYSLOG (Logging to Terminal/Logging to Server/CLI Operation to Server), LLDP, WEB(HTTP), Console, Telnet, SSH, Cloud, System Upgrade (TFTP/FTP/SFTP/WEB), Configuration Management (Backup/Restore), Factory Reset, Password Reset, ISSU, Hot Patch, Keep-Alive Gateway, Cloud Management

Zero Touch Provisioning ZTP Through DHCP Server, USB and Flash Disk

High Availability

Device Virtualization H-VST, M-VST

Detection Mechanism MAD LACP, MAD BFD, MAD Fast-Hello, MAD LACP

Protocols HA, ULFD, UDLD, G.8032, ULPP, Monitor Link, VRRP, VRRPv3, VBRP, EEP, BFD with Static/RIP/OSPF/BGP/ISIS

Stacking

Physical Stacking Yes

Max No. of Switches 8

Bandwidth 80Gbps, 120Gbps (I2300M-8T-24G-4X)

Standards Compliance

IEEE Standard 802.1D Bridging and Spanning Tree Protocol
 802.1p Quality of Service and Class of Service Priority
 802.1Q Virtual LAN tagging
 802.1ad Double Tagging of Data
 802.1w Rapid Spanning Tree Protocol
 802.1s Multiple Spanning Tree Protocol
 802.1ag Connectivity Fault Management
 802.1x Port-Based Network Access Control
 802.1AB Link Layer Discovery Protocol
 802.3 10BASE-T
 802.3u 100BASE-T
 802.3z 1000BASE-X
 802.3ab 1000BASE-T
 802.3ae 10G BASE-X
 802.3ah Ethernet in the First Mile Operations, Administration, and Maintenance
 802.3ad Link Aggregation
 802.3x Flow Control

 RFC 2460 Internet Protocol, Version 6 (IPv6) Specification
 RFC 4861 Neighbor Discovery for IP Version 6 (IPv6)
 RFC 4862 IPv6 Stateless Address Auto configuration
 RFC 4443 Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6)

I2350M Series

Infinique Networks Layer3 10G Managed Aggregation Switch

TECHNICAL SPECIFICATIONS

Non-POE Models

I2350M-48G-4X I2350M-32T-16G-4X

General

10/100/1000 Ports	NA	32x RJ-45 Ports
SFP 1G Ports	48x 1G Fiber Ports	16x 1G Fiber Ports
SFP+ 10G Ports	4x 10G Fiber Ports	4x 10G Fiber Ports
Expansion Slot (2-Port SFP+)	1x (Not Stackable)	
Console Ports	1x RJ-45, 1x USB	
Host Support	IPv4 / IPv6 ready	
LED Indicator Status	Power: Yellow, System: Yellow, Network: Link/Act Yellow, SFP: Link/Act Green, PoE: Green	
Fan	Single Fixed	
Factory Reset Button	Yes	

Performance

Switching Bandwidth	216Gbps	216Gbps
Transmission	Store and Forward	
Forwarding Rate	130.95mpps	130.95mpps
Buffer Memory	2M	2M
Jumbo Frame	12Kbytes	
MAC Addresses Table Size	32K	32K
VLAN Entries	4K	4K
IPv4 Host Table (ARP)	8K	8K
IPv4 Routing Entries	12K	12K
IPv6 Host Table (ND)	8K	8K
IPv6 Routing Entries	4K	4K
L3 Multicast Entries	6K	6K
VRRP Group	255	255
MTBF	300,000 hours	

Power Management

Power Supply Type	Dual Fixed	Dual Fixed
Power Input	AC 100~240V 50~60Hz	
Max Power Consumption	55W	55W

Environment

Temperature (Celsius)	Operating: -5 °C to +45 °C; Storage: -40 °C to +70 °C	
Humidity	Operating: 10% to 90% non-condensing; Storage: 5% to 95% non-condensing	
Heat Dissipation (BTU)	260	168

Physical

Dimensions (WxDxH) mm	442×420×44.2	442×420×44.2
Weight	5Kg	5Kg

Mounting Options

Standards and Compliance

Safety	CE/LVD EN 62368-1 RoHS
EMC/EMI	EN 55032, EN 55035, EN 61000-3-2, EN 61000-3-3
Green Energy (EEE)	IEEE802.3az Energy Efficient Ethernet Task Force
Lighting Protection	6KV

I2350M Series

Infinique Networks Layer3 10G Managed Aggregation Switch

Ordering Information

Part Number	Description
Switches Models	
I2350M-48G-4X	Infinique I2350M Series Layer 3 1G Cloud Managed Aggregation Switch, 48x 1G SFP, 4x 10G SFP+ Ports, One Expansion Slot, Dual Power Slots
I2350M-32T-16G-4X	Infinique I2350M Series Layer 3 1G Cloud Managed Aggregation Switch, 32x 100/1000M Ethernet, 16x 1G SFP, 4x 10G SFP+ Ports, One Expansion Slot, Dual Power Slots
Expansion Module	
I2350M-2X-EM	2-Port 10G SFP+ Expansion Module (Not Stackable)
Power Module	
I2350M-AC-120-PWR	Infinique I2350M Series Layer 3 1G Cloud Managed Aggregation Switch, 120W AC Power Supply Module

Customer Support, Service and Warranty

Infinique network switches come with a standard one-year limited hardware warranty that covers repair or replacement of parts. Cloud and Software: 90 days, can be extended with support contract