

INB513V-RTE

5 Megapixel Premium Series IP IR Bullet Camera

Infinique offers a wide range of IP based high definition cameras available in various housing formats, including Box, Dome and Bullet. Our cameras are equipped with superior image sensor and digital signal processor to produce sharp, crisp pictures and are enclosed in weather and vandal resistant housings making it suitable for use in all security applications. The ONVIF compliance of the cameras helps in easy integration, providing peace of mind for your investment. From small to very large installations, Infinique's cameras are reliable, future proof and an ideal solution for your video surveillance needs.

The INB513V-RTE is a 5 Megapixel high resolution IR Camera with varifocal lens. It is built with a vandal resistant aluminum housing, incorporating a high quality image sensor and IR LEDs to provide clear crisp images both during the Day and Night.

The camera comes equipped with a 2.8~12mm varifocal lens with manual zoom and focus for setup of field of view. The Auto Iris control allows the camera to automatically set its iris position to maximize image quality in all lighting conditions. The camera streams real-time video at high definition resolution using H.264 or H.265 compression optimizing the bandwidth and increasing storage efficiency.


Built-in PoE for powering the camera and the flexible 3-axis bracket for fixing it on ceiling or wall, provides the convenience for installers to complete the installation quickly and with ease. These excellent IP cameras are highly suitable for video surveillance of government buildings, residential apartments, schools, colleges, universities, shopping malls, hospitals, hotels, industrial parks, and corporate offices.

Product Features

- 1/2.8" Progressive Sensor
- 5 Megapixel Resolution @ 20 fps
- IR Distance 45 meters
- 2.8~12mm Varifocal Lens
- Digital WDR
- H.265, H.264 and MJPEG Compressions
- Up to 3 Simultaneous Video Streams
- S/N Ratio of more than 50dB
- Micro SD Card Slot for Onboard Storage
- Composite Video Output
- Two Way Audio, Alarm I/O
- Power Over Ethernet (PoE), IEEE 802.3af
- IP67 Rated
- Vandal Proof Aluminum Alloy Housing
- Wall or Ceiling Mount with 3 Axis Bracket
- ONVIF Compliant




Dimensions



Accessories







Part Number: IJBBCM-134 Ceiling Mount Junction Box



Part No: IBKTCM Pendant Ceiling Bracket




Part No: IBBCPM Pole Mount Bracket



Part No: IBCRWM Corner Mount Bracket

INB513V-RTE





INAAOE DEDEODRAANS	1144 OF DEDECOMANOS		
IMAGE PERFORMANO			
Image Sensor	1/2.8" Progressive Sensor		
Effective Pixels (H x V)	2592 × 1944		
Resolution (Megapixels)	5		
Minimum Illumination	0.002 lux (AGC ON) 0 lux with IR ON		
Image Rate (FPS)	20		
S/N Ratio	More than 50dB		
IR Distance	45		
LENS			
Focal Length (mm)	2.8~12 Varifocal Zoom Lens		
Iris	DC Auto Iris, Manual		
Aperture Ratio	F1.2		
Angle of View (deg)	H:102 (Wide)~31 (Tele), V:73 (Wide)~23 (Tele)		
VIDEO AND AUDIO			
Video Compression	H.265 Main Profile H.264 Baseline Profile/Main Profile/High Profile		
Main Stream	2592 x 1944, 2592 x 1520, 2048 x 1520, 1920 x 1080, 1280 x 960, 1280 x 720		
Sub Stream	1280 x 720, 640 x 480, 320 x 240		
Mobile Stream	640 x 480, 320 x 240		
Electronic Shutter Control	1/5 ~ 1/20,000 sec		
Day/Night Control	True Day/Night with IR Cut Filter		
Flicker Control	50 Hz, 60 Hz		
WDR	Digital WDR		
3D Noise Reduction	Auto / Manual / Disable		
White Balance	Automatic / Manual		
Back Light Compensation	On / Off		
Automatic Gain Control	Auto/Manual, Adjustable Level		
Privacy Mask Zones	Up to 4 Privacy Mask Zones		
Audio Compression	G.711A/ G.711U/ G.726		
Audio Input/ Output	Line level input and output, 3.5mm A/V Interface		
Video Output	2 pin terminal block		
Video Bit rate	256K-8M ,Supports CBR/VBR		
OSD	Camera ID, Timestamp		
Image Orientation	Image Flip, Corridor Mode, Rotation		
Image Controls	Brightness, Contrast, Hue, Saturation, Sharpness		
Advanced Functions	Image Rotation, Gain Control, Anti-Fog, Anti-False Color, Anti-Shake, IR Detection		
VIDEO ANALYTICS			
Motion Detection	Multiple Zones		
Advance Video Analytics	Tamper, Out Of Focus, Sound, Perimeter Intrusion, Line Crossing, Stationary Object, Pedestrian Detection, People Counting, Face Detection		

LOCAL STORAGE	
Storage Type	Micro SD card, Max up to 128GB
Recording	Video and Image; Auto / Schedule/ Manual / On Event
NETWORK	<u> </u>
Network Port	10/100M BASE-TX, RJ-45 Connector
Cabling Type	Category 6 and higher
Network Protocol	IPv4, HTTP, HTTPS, TCP/IP, Unicast/Multicast, UDP, RTP, RTSP, RTCP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, SNMP, UPNP, IEEE802.1X
ONVIF Protocol	ONVIF Compliant
Security	User Access with password protection, IP Filtering
Users	1 Administrator, 6 Users
Simultaneous Viewing	Up to 5 users
PC Web Browser	IE 6.0 Above; Mozilla Firefox; Google Chrome
Mobile Device	Windows Mobile, Symbian, iPhone, Android
Events	Motion, Tamper Detection, Sensor, Network Failure
Event Handlers	FTP, E-mail, Local Storage
MECHANICAL	
Housing ID	V4BOMWH670745A1
Dimensions (mm)	87 (W) x 242 (L) x 84 (H)
Weight (g)	650
Housing	Vandal Resistant Aluminum Alloy Housing
Finish	White Powder Coat, RAL 9003
Installation	Ceiling Mount / Wall Mount, 3-Axis Concealed Bracket
ELECTRICAL	
Power Consumption	440mA, 12V DC, 5.28 Watts
Power Source	PoE IEEE802.3af; DC12V
Power Connector	DC Male Plug
RTC Backup Battery	3V Magnesium Lithium
ENVIRONMENTAL	
Operating Temperature (C)	-20 to +60
Storage Temperature (C)	-20 to +60
Operating Humidity	0% - 95% non condensing
Ingress Protection Rating	IP67
Impact Rating	IKO7
STANDARDS COMPLIA	NCE
Emissions	FCC Part 15 Subpart B Class B EN 55022:2010 IC ICES-003 Class B
Immunity	EN 55024:2010

UL 609501, EU: 2001/95/EC GPSD

Ordering information		
PART NUMBER	DESCRIPTION	
INB513V-RTE	Infinique Premium Series Indoor Outdoor IR Bullet Camera, 5MP, 2.8-12mm Varifocal Lens, IR Array LED, 45m IR Range, H.265, H.264, MJPEG, 20fps, True Day and Night with ICR, Built-in MIC, SCHC Slot, ONVIF Compliant, PoE, IP67	
IJBBWM-134	Infinique Wall Mount Junction Box, Base Diameter 134.3 mm	
IJBBCM-134	Infinique Ceiling Mount Junction Box, Base Diameter 134.3 mm	
IBKTCM	Infinique Pendant Mount Ceiling Bracket, 45 (D) x 294 (H) mm	
IBBCPM	Infinique Pole Mount Bracket with Metal Ties, 125 (L) x 46 (W) x 200 (H) mm	
IBCRWM	Infinique Corner Mount Bracket, 200 (L) x 130 (W) x 172.8 (D) mm	


Safety



Housing Accessories





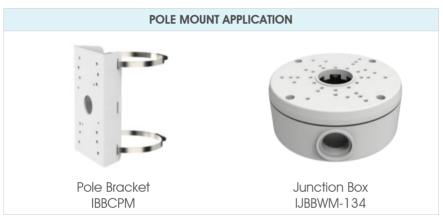







Infinique, a Canadian company is a manufacturer of high performing end-to-end solutions in copper, fiber and video surveillance systems. For more information visit our website at www.infinique.com or email us at sales@infinique.com.